

FORM PTO-1390 REV. 5-93		US DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEYS DOCKET NUMBER <b>P01,0073</b>
<b>TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371</b>			U.S. APPLICATION NO. (if known, see 37 CFR 1.5) <b>09/807126</b>
INTERNATIONAL APPLICATION NO. <b>PCT/DE99/03170</b>	INTERNATIONAL FILING DATE <b>01 October 1999</b>	PRIORITY DATE CLAIMED <b>15 October 1998</b>	
TITLE OF INVENTION <b>ANTENNA ARRAY FOR A RADIO STATION WHICH CAN BE OPERATED IN A PLURALITY OF FREQUENCY RANGES, AND A RADIO STATION</b>			
APPLICANT(S) FOR DO/EO/US <b>Rainer ECKERT</b>			
Applicant herewith submits to the United States /Designated/Elected Office (DO/EO/US) the following items and other information.			
<p>1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</p> <p>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</p> <p>3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay.</p> <p>4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination will be made by the 19th month from the earliest claimed priority date.</p> <p>5. <input checked="" type="checkbox"/> A copy of International Application as filed (35 U.S.C. 371(c)(2))</p> <p>a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).</p> <p>b. <input type="checkbox"/> has been transmitted by the International Bureau.</p> <p>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US)</p> <p>6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).</p> <p>7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. §371(c)(3))</p> <p>a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).</p> <p>b. <input type="checkbox"/> have been transmitted by the International Bureau.</p> <p>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</p> <p>d. <input checked="" type="checkbox"/> have not been made and will not be made.</p> <p>8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</p> <p>9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). <b>Executed</b></p> <p>10. <input checked="" type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</p> <p><b>Items 11. to 16. below concern other document(s) or information included:</b></p> <p>11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98; <b>(PTO 1449, Prior Art, Search Report)</b>.</p> <p>12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. 3.28 and 3.31 is included. <b>(SEE ATTACHED ENVELOPE)</b></p> <p>13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</p> <p>14. <input checked="" type="checkbox"/> A substitute specification - <b>Marked up copy of Substitute Specification.</b></p> <p>15. <input type="checkbox"/> A change of power of attorney and/or address letter.</p> <p>16. <input checked="" type="checkbox"/> Other items or information:</p> <p>a. <input checked="" type="checkbox"/> Submission of Drawings - <b>Eight sheets of drawings - Drawing Correction Letter - Translation of Drawings</b></p> <p>b. <input checked="" type="checkbox"/> <b>EXPRESS MAIL #EL655302205US dated April 6, 2001</b></p>			

09/807126

PCT/DE99/03170

P01,0073

**BASIC NATIONAL FEE (37 C.F.R. 1.492(a)(1)-(5):**

Search Report has been prepared by the EPO or JPO ..... \$860.00

International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) ..... \$690.00

No international preliminary examination fee paid to USPTO (37 C.F.R. 1.482) but international search fee paid to USPTO (37 C.F.R. 1.445(a)(2)) ..... \$760.00

Neither international preliminary examination fee (37 C.F.R. 1.482) nor international search fee (37 C.F.R. 1.445(a)(2)) paid to USPTO ..... \$970.00

International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) ..... \$96.00

**ENTER APPROPRIATE BASIC FEE AMOUNT =**

\$860.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 C.F.R. 1.492(e)).

\$ 0

Claims

Number Filed

Number  
Extra

Rate

Total Claims

7 - 20 =

0

X \$ 18.00

\$ 0

Independent Claims

3 - 3 =

0

X \$ 80.00

\$ 0

Multiple Dependent Claims

\$270.00 +

\$

**TOTAL OF ABOVE CALCULATIONS =**

\$ 0

Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed (Note 37 C.F.R. 1.9, 1.27, 1.28)

\$

**SUBTOTAL =**

\$ 0

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(f)).

\$

**TOTAL NATIONAL FEE =**

\$ 0

Fee for recording the enclosed assignment (37 C.F.R. 1.21(h). The assignment must be accompanied by an appropriate cover sheet (37 C.F.R. 3.28, 3.31). \$40.00 per property

+

**TOTAL FEES ENCLOSED =**

\$860.00

Amount to be  
refunded

\$

charged

\$

a. ☒ A check in the amount of \$ **860.00** to cover the above fees is enclosed.b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_ to cover the above fees. A duplicate copy of this sheet is enclosed.c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **501519**. A duplicate copy of this sheet is enclosed.**NOTE:** Where an appropriate time limit under 37 C.F.R. 1.494 or 1.495 has not been met, a petition to revive (37 C.F.R. 1.137(a) or (b)) must be filed and granted to restore the application to pending status.**SEND ALL CORRESPONDENCE TO:**Schiff Hardin & Waite  
Patent Department  
6600 Sears Tower  
Chicago, Illinois 60606  
CUSTOMER NO. 26574**SIGNATURE**

Brett A. Valiquet

**NAME**

27,841

**Registration Number**

J008 Rec'd PCT/PTO 06 APR 2001

-1-

BOX PCT

IN THE UNITED STATES ELECTED OFFICE  
OF THE UNITED STATES PATENT AND TRADEMARK OFFICE  
UNDER THE PATENT COOPERATION TREATY-CHAPTER II

5

PRELIMINARY AMENDMENT

APPLICANT: Rainer ECKERT

DOCKET NO: P01,0073

SERIAL NO:

GROUP ART UNIT:

EXAMINER:

10

INTERNATIONAL APPLICATION NO: PCT/DE99/03170

INTERNATIONAL FILING DATE: 01 October 1999

INVENTION: "ANTENNA ARRAY FOR A RADIO STATION WHICH  
CAN BE OPERATED IN A PLURALITY OF  
FREQUENCY RANGES, AND A RADIO STATION"

15

Assistant Commissioner for Patents,  
Washington, D.C. 20231

Sir:

20

As a Preliminary Amendment for entry into the  
National Stage for the above-identified PCT application,  
the following is submitted:

IN THE SPECIFICATION, TITLE AND ABSTRACT:

Enclosed is a Substitute Specification amending the  
title, specification, and abstract No new matter is  
added by the substitute specification. A marked-up copy

of the specification, title and abstract is also enclosed.

**IN THE DRAWINGS:**

5 Please amend the drawings as indicated in the attached Drawing Correction Letter.

**IN THE CLAIMS:**

Please cancel claims 1-3 from the substitute pages in the PCT prosecution and add new claims 11-17 as follows:

10 11. A mobile station for operation within different mobile radio systems to which a different frequency range is in each case allocated, each frequency range in each case having a transmission frequency band and a reception frequency band, comprising:

15 a first transmission antenna for transmitting signals within the transmission frequency band of a first frequency range;

20 a second transmission antenna for transmitting signals within the transmission frequency band of a second frequency range;

a first reception antenna for receiving signals within the reception frequency band of the first frequency range; and

25 a second reception antenna for receiving signals within the reception frequency band of the second frequency range.

12. The mobile station as claimed in claim 11 in which the first transmission antenna is identical to the second transmission antenna.

13. The mobile station as claimed in claim 11 in which the first reception antenna is identical to the second reception antenna.

14. A mobile station for operation within different mobile radio systems to which a different frequency range is in each case allocated, each frequency range in each case having a transmission frequency band and a reception frequency band, comprising:

a first transmission antenna for transmitting signals within the transmission frequency band of a first frequency range;

a second transmission antenna for transmitting signals within the transmission frequency band of a second frequency range;

a first reception antenna for receiving signals within the reception frequency band of the first frequency range;

a second reception antenna for receiving signals within the reception frequency band of the second frequency range;

the first transmission antenna being substantially identical to the second transmission antenna; and

the first reception antenna being substantially identical to the second reception antenna.

15. A method for operating a mobile station within different mobile radio systems to which a different frequency range is in each case allocated, each frequency range in each case having a transmission frequency band and a reception frequency band, comprising the steps of:

transmitting signals within the transmission frequency band of a first frequency range with a first transmission antenna;

transmitting signals within the transmission frequency band of a second frequency range with a second transmission antenna;

receiving signals within the reception frequency band of the first frequency range with a first reception antenna; and

receiving signals within the reception frequency band of the second frequency range with a second reception antenna.

16. The method according to claim 15 including the step of providing the first transmission antenna substantially identical to the second transmission antenna.

17. The method according to claim 15 including the step of providing the first reception antenna substantially identical to the second reception antenna.

REMARKS

The specification and abstract have been amended in accordance with U. S. practice and for improved readability and clarity. A substitute specification is attached together with a marked up version of the substitute specification showing changes made.

The Drawing Correction Letter amends the drawings in accordance with U. S. practice.

New claims are presented substantially based on PCT claims but drawn in accordance with U. S. practice. Also, additional claims have been added.

The new claims 11-13 substantially replacing the PCT claims have not been narrowed and were not made for patentability reasons.

An Information Disclosure Statement is enclosed.

Respectfully submitted,



(Reg. No. 27,841)

Brett A. Valiquet  
**Schiff Hardin & Waite**  
Patent Department  
6600 Sears Tower  
Chicago, Illinois 60606  
Telephone: 312-258-5786  
ATTORNEY FOR APPLICANTS

CUSTOMER NUMBER 26574

## S P E C I F I C A T I O N

## TITLE

"ANTENNA ARRAY FOR A RADIO STATION WHICH CAN BE  
OPERATED IN A PLURALITY OF FREQUENCY RANGES, AND  
5 A RADIO STATION"

## BACKGROUND OF THE INVENTION

The invention relates to an antenna array for a  
radio station which can be operated in a plurality of  
frequency ranges, and a radio station, in particular a  
10 multiband mobile station.

National regulatory authorities divide a  
frequency range (around 900 MHz) provided for a radio  
system or mobile radio system, for example the GSM 900  
(Global System for Mobile Communication) system, into  
15 different frequency bands, which are then allocated to  
different network operators, for example D1, D2. A  
different frequency range (around 1800 MHz) is  
allocated to a different mobile radio system, the DCS  
1800 (Digital Communication System). Further different  
20 frequency ranges are allocated to further, if  
necessary, future mobile radio systems, such as the  
UMTS (Universal Mobile Telephony System) which is  
currently being standardized. In the case of a duplex  
system involving FDD (Frequency Division Duplex)  
25 systems such as the GSM system, different frequency  
bands can be provided for the uplink (mobile station to  
base station) than for the downlink (base station to  
mobile station). The duplex spacing is 45 MHz for the  
GSM 900 system and 95 MHz for the DCS 1800 system.

30 Terms and examples used in this application  
also often relate to a GSM mobile radio system.  
However, they are in no way restricted thereto; but  
with reference to the description, can also be easily

SUBSTITUTE SPECIFICATION

mapped by a person skilled in the art onto other, if necessary, future mobile radio systems such as CDMA systems, in particular wideband CDMA systems or TD/CDMA systems.

5            Mobile stations are known which, under the name of dual-band mobile stations or multiband radio stations, can be operated in a plurality of these frequency ranges and enable alternative communication via a plurality of these aforementioned mobile radio  
10 systems.

Figure 8 shows a schematic representation of a transceiver system of conventional mobile stations of this type. According to the different frequency ranges of the GSM system and the DCS system in which the  
15 mobile station can be operated, different power amplifiers GSM PA, DCS PA are provided whose transmission signals are fed via an antenna switch S and a diplexer D, which essentially comprises a filter or duplexer, and an antenna ANT, such as a rod antenna.  
20 In the opposite direction, reception signals are received by the antenna ANT and are fed via the diplexer D and the antenna switch S to the reception amplifiers (low noise amplifiers) GSM LNA, DCS LNA corresponding to the different frequency ranges of the  
25 different mobile radio systems. An antenna switch S and a diplexer D (or a duplexer) are contained in the antenna array or are assigned to the antenna.

However, there has recently been an increasing requirement in radio stations, particularly in mobile  
30 stations for increasingly smaller, more compact and lighter devices.

SUMMARY OF THE INVENTION

An object of the invention is to indicate an antenna array for a radio station which can be operated in a plurality of frequency ranges and which enables  
5 implementation of small, lightweight radio stations, in particular mobile stations.

A mobile station for operation within different mobile radio systems to which a different frequency range is in each case allocated. Each frequency range  
10 in each case has a transmission frequency band and a reception frequency band. A first transmission antenna is provided for transmitting signals within the transmission frequency band of the first frequency range. A second transmission antenna is provided for  
15 transmitting signals within the transmission frequency band of the second frequency range. The first reception antenna is provided for receiving signals within the reception frequency band of the first frequency range. A second reception antenna is  
20 provided for receiving signals within the reception frequency band of the second frequency range.

In a method of the invention, a mobile station is operated within different mobile radio systems to which a different frequency range is in each case  
25 allocated. Each frequency range in each case has a transmission frequency band and a reception frequency band. Signals are transmitted within the transmission frequency band of a first frequency range with a first transmission antenna. Signals are transmitted within  
30 the transmission frequency band of a second frequency range with a second transmission antenna. Signals are received within a reception frequency band of the first frequency range with a first reception antenna.

Signals are received within a reception frequency band of the second frequency range with a second reception antenna.

5 The invention is therefore based, among other concepts, on the idea of using a plurality of antennas, whereby different antennas are provided for transmission signals and reception signals.

10 As a result, antenna switches are no longer required and therefore a small, lightweight antenna array is implemented for a radio station which is operated in a plurality of frequency ranges.

In a further design, different antennas are also provided for different frequency ranges.

15 As a result, a diplexer or duplexer can also be dispensed with and an even smaller, more lightweight antenna array can therefore be implemented.

20 In a further embodiment of the invention, the polarization direction of an antenna for transmission signals differs from the polarization direction of an antenna for reception signals.

The excitation of a reception antenna by a corresponding transmission antenna fitted in the same radio station can thus be prevented.

25 The invention is described in detail below with reference to preferred embodiments, which are explained by means of the figures listed below.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

30 Figure 1 is a block diagram of an antenna array with different antennas for transmission signals and reception signals;

Figure 2 is a block diagram of an antenna array with different antennas for different frequency ranges, transmission signals and reception signals;

Figure 3 is a block diagram of an antenna array with different antennas for transmission signals and reception signals, and for reception signals of different frequency ranges;

5           Figure 4 is a block diagram of an antenna array with different antennas for transmission signals and reception signals, and for transmission signals of different frequency ranges;

10           Figure 5 is a cross-sectional view of a patch antenna;

Figure 6 is an antenna array with different polarization directions for transmission signals and reception signals;

15           Figure 7 is a block diagram of a radio station; and

Figure 8 is a block diagram of a conventional antenna array.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

20           For the purposes of promoting an understanding of the principles of the invention, reference will now be made to the preferred embodiment illustrated in the drawings and specific language will be used to describe the same. It will nevertheless be understood that no limitation of the scope of the invention is thereby intended, such alterations and further modifications in the illustrated device, and such further applications of the principles of the invention as illustrated therein being contemplated as would normally occur to one skilled in the art to which the invention relates.

30           Figure 1 shows a block diagram of an antenna array A, in which different antennas ANT are provided for the transmission mode and the reception mode. In order to show the embodiments clearly, the block

diagrams of the antenna arrays are substantially simplified and therefore show no passive components, such as filters, 50-ohm adapter circuits, or power-regulating loops of the amplifiers. The transmission  
5 and reception amplifiers can also be regarded as representing the transmission and reception paths.

In the context of this application, an "antenna" also contains a resonator and a connection assigned to this resonator.

10 GSM and DCS transmission signals are amplified by a GSM DCS power amplifier GSM DCS PA and are fed and emitted via a connection of the associated antenna ANT1 which is adapted to the transmission frequency band of the GSM 900 frequency range and to the transmission  
15 frequency band of the DCS 1800 frequency range.

GSM and DCS reception signals are received by a second antenna ANT2 which is adapted to the reception frequency band of the DCS 1800 frequency range and to  
20 the reception frequency band of the GSM 900 frequency range. Following corresponding filtering by a diplexer, the signals are amplified by corresponding reception amplifiers DCS LNA (low noise amplifiers) GSM LNA. It is thus possible to dispense with antenna switches and  
25 thereby implement a small, lightweight antenna array.

Figure 2 shows a block diagram of an antenna array A, in which different antennas ANT are provided for different frequency bands and different antennas are likewise provided for the transmission mode and the  
30 reception mode.

GSM transmission signals are amplified by a GSM power amplifier GSM PA and are fed via a connection of the associated antenna ANT1 which is adapted to the

transmission frequency band of the GSM 900 frequency range. DCS transmission signals are amplified by a corresponding different power amplifier DCS PA and are fed to a second antenna ANT2 which is adapted to the transmission frequency band of the DCS 1800 frequency range and is emitted there.

DCS reception signals are received by a third antenna ANT3 which is adapted to the reception frequency band of the DCS 1800 frequency range, are amplified by a corresponding reception amplifier DCS LNA (low noise amplifier) and, following demodulation and filtering, are fed to a digital signal processor of a radio station. GSM reception signals are received by a fourth correspondingly adapted antenna ANT4 and are amplified by a corresponding reception amplifier device GSM LNA. It is thus possible to dispense with antenna switches and diplexers and thereby implement a small, lightweight antenna array.

In designs of the invention, further antennas are provided which are either likewise used to implement frequency duplex operation, albeit in a different frequency range, or to implement time duplex operation in a different frequency range, to which antenna switches or diplexers can be assigned for signal separation. Examples of further frequency ranges are the frequency ranges of third-generation mobile radio systems such as the UMTS system which is currently being standardized (combination of wideband CDMA and TD/CDMA), or other CDMA systems, the DECT system, or other cordless systems.

Figure 3 shows an embodiment which differs from the design shown in Figure 1 in that different antennas ANT2, ANT3 are provided for the reception signals

according to the different frequency ranges, thereby eliminating the need for a diplexer.

Figure 4 shows an embodiment which differs from the design shown in Figure 1 in that different  
5 transmission amplifiers GSM PA, DCS PA and different antennas are provided according to the different frequency ranges.

Figure 5 shows a section view of a patch antenna comprising a connection ANK, a ground area M,  
10 an insulation, for example ceramic, a substrate SUB, a resonator RES and a short circuit K between the resonator RES and the ground area M. The polarization direction POL of a patch antenna of this type is indicated by the double arrow. The signals can also be  
15 connected in a different manner to that shown here, for example capacitively.

Figure 6 shows an antenna array comprising four antennas which correspond to a transmission mode and a reception mode in two frequency ranges and which are  
20 arranged on a support, for example a board or substrate SUB, with corresponding connections ANK1-4, resonators RES1-4, and short circuits K1-4 between the ground area and the resonators.

In order as far as possible to prevent the  
25 excitation of a reception antenna by the corresponding transmission antenna in the same frequency range, the polarization directions of the corresponding transmission and reception antennas are aligned at right angles to one another.

30 In a different design of the invention, the different antennas are physically separated and are implemented with the maximum possible spacing between

them. This can also result in prevention of the  
aforementioned undesirable excitations.

In a different embodiment, all or at least some  
of the antennas are aligned in parallel with one  
5 another.

In a further embodiment of the invention, the  
individual antennas or resonators are narrowband  
antennas or resonators. This can also result in  
prevention of the aforementioned undesirable  
10 excitations.

Figure 7 shows a radio station which may, in  
particular, be a mobile station MS, comprising an  
operating unit MMI, a control device STE, a processing  
device VE, a power supply device SVE, a reception  
15 device EE, and a transmission device SE.

The control device STE essentially comprises a  
program-controlled microcontroller, which controls and  
monitors all essential elements and functions of the  
radio station.

20 The processing device VE can also be formed by a  
digital signal processor DSP.

The radio-frequency component HF comprises the  
transmission device SE, with a modulator and an  
amplifier, and a reception device EE with a demodulator  
25 and likewise an amplifier.

The frequency of a voltage-controlled  
oscillator VCO is fed via the synthesizer SYN to the  
transmission device SE and the reception device EE. The  
system clock for timing the processor devices of the  
30 equipment can also be generated by means of the  
voltage-controlled oscillator VCO. Reception signals  
are received and transmission signals are transmitted  
via the antenna array A, as shown in Figure 1.

5

An antenna array for a radio station which can be operated in a plurality of frequency ranges has a plurality of antennas, with different antennas being provided for transmission signals and reception signals.

SUBSTITUTE SPECIFICATION

[Description] S P E C I F I C A T I O N

[Antenna array for a radio station which can be operated in a plurality of frequency ranges, and a radio station] TITLE

5     "ANTENNA ARRAY FOR A RADIO STATION WHICH CAN BE OPERATED IN A PLURALITY OF FREQUENCY RANGES, AND A RADIO STATION"

BACKGROUND OF THE INVENTION

10     The invention relates to an antenna array for a radio station which can be operated in a plurality of frequency ranges, and a radio station, in particular a multiband mobile station.

15     National regulatory authorities divide a frequency range (around 900 MHz) provided for a radio system or mobile radio system, for example the GSM 900 (Global System for Mobile Communication) system, into different frequency bands, which are then allocated to different network operators, for example D1, D2. A different frequency range (around 1800 MHz) is  
20     allocated to a different mobile radio system, the DCS 1800 (Digital Communication System). Further different frequency ranges are allocated to further, if necessary, future mobile radio systems, such as the UMTS (Universal Mobile Telephony System) which is  
25     currently being standardized. In the case of a duplex system involving FDD (Frequency Division Duplex) systems such as the GSM system, different frequency bands can be provided for the uplink (mobile station to base station) than for the downlink (base station to  
30     mobile station). The duplex spacing is 45 MHz for the GSM 900 system and 95 MHz for the DCS 1800 system.

Terms and examples used in this application also often relate to a GSM mobile radio system [also;

however]. However, they are in no way restricted thereto[,], but[,], with reference to the description, can also be easily mapped by [the] a person skilled in the art onto other, if necessary, future mobile radio systems such as CDMA systems, in particular wideband CDMA systems or TD/CDMA systems.

Mobile stations are known which, under the name of dual-band mobile stations or multiband radio stations, can be operated in a plurality of these frequency ranges and enable alternative communication via a plurality of these aforementioned mobile radio systems.

Figure 8 shows a schematic representation of a transceiver system of conventional mobile stations of this type. According to the different frequency ranges of the GSM system and the DCS system in which the mobile station can be operated, different power amplifiers GSM PA, DCS PA are provided whose transmission signals are fed via an antenna switch S and a diplexer D, which essentially comprises a filter[,], or diplexer, and an antenna ANT, such as a rod antenna. In the opposite direction, reception signals are received by the antenna ANT and [the] are fed via the diplexer D and the antenna switch S to the reception amplifiers (low noise amplifiers) GSM LNA, DCS LNA corresponding to the different frequency ranges of the different mobile radio systems. An antenna switch S and a diplexer D [or diplexer] (or a diplexer) are contained in the antenna array or are assigned to the antenna.

However, there has recently been an increasing requirement in radio stations, particularly in mobile stations for increasingly smaller, more compact and lighter devices.

**SUMMARY OF THE INVENTION**

An [The] object of the invention is [therefore] to indicate an antenna array for a radio station which can be operated in a plurality of frequency ranges and  
5 which enables implementation of small, lightweight radio stations, in particular mobile stations.

A mobile station for operation within different mobile radio systems to which a different frequency range is in each case allocated. Each frequency range in each case has a transmission frequency band and a reception frequency band. A first transmission antenna is provided for transmitting signals within the transmission frequency band of the first frequency range. A second transmission antenna is provided for transmitting signals within the transmission frequency band of the second frequency range. The first reception antenna is provided for receiving signals within the reception frequency band of the first frequency range. A second reception antenna is provided for receiving signals within the reception frequency band of the second frequency range.

10  
15  
20

In a method of the invention, a mobile station is operated within different mobile radio systems to which a different frequency range is in each case allocated. Each frequency range in each case has a transmission frequency band and a reception frequency band. Signals are transmitted within the transmission frequency band of a first frequency range with a first transmission antenna. Signals are transmitted within the transmission frequency band of a second frequency range with a second transmission antenna. Signals are received within a reception frequency band of the first frequency range with a first reception antenna.

25  
30

Signals are received within a reception frequency band of the second frequency range with a second reception antenna [This object is achieved by the features of the independent claims. Further designs are presented in the subclaims].

The invention is therefore based, among other concepts, on the idea of using a plurality of antennas, whereby different antennas are provided for transmission signals and reception signals.

As a result, antenna switches are no longer required and therefore a small, lightweight antenna array [can be] is implemented for a radio station which [can be] is operated in a plurality of frequency ranges.

In a further design, different antennas are also provided for different frequency ranges.

As a result, a diplexer or duplexer can also be dispensed with and an even smaller, more lightweight antenna array can therefore be implemented.

In a further embodiment of the invention, the polarization direction of an antenna for transmission signals differs from the polarization direction of an antenna for reception signals.

The excitation of a reception antenna by a corresponding transmission antenna fitted in the same radio station can thus be prevented.

The invention is described in detail below with reference to preferred embodiments, which are explained by means of the figures listed below[:].

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

Figure 1 is a block diagram of an antenna array with different antennas for transmission signals and reception signals;

Figure 2 is a block diagram of an antenna array with different antennas for different frequency ranges, transmission signals and reception signals;

Figure 3 is a block diagram of an antenna array with different antennas for transmission signals and reception signals, and for reception signals of different frequency ranges;

Figure 4 is a block diagram of an antenna array with different antennas for transmission signals and reception signals, and for transmission signals of different frequency ranges;

Figure 5 is a cross [section]-sectional view of a patch antenna;

Figure 6 is an antenna array with different polarization directions for transmission signals and reception signals;

Figure 7 is a block diagram of a radio station; and

Figure 8 is a block diagram of a conventional antenna array.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

For the purposes of promoting an understanding of the principles of the invention, reference will now be made to the preferred embodiment illustrated in the drawings and specific language will be used to describe the same. It will nevertheless be understood that no limitation of the scope of the invention is thereby intended, such alterations and further modifications in the illustrated device, and such further applications of the principles of the invention as illustrated therein being contemplated as would normally occur to one skilled in the art to which the invention relates.

Figure 1 shows a block diagram of an antenna array A, in which different antennas ANT are provided for the transmission mode and the reception mode. In order to show the embodiments clearly, the block diagrams of the antenna arrays are substantially simplified and therefore show no passive components, such as filters, 50-ohm adapter circuits, or power-regulating loops of the amplifiers. The transmission and reception amplifiers can also be regarded as representing the transmission and reception paths.

In the context of this application, an "antenna" also contains a resonator and a connection assigned to this resonator.

GSM and DCS transmission signals are amplified by a GSM DCS power amplifier GSM DCS PA and are fed and emitted via a connection of the associated antenna ANT1 which is adapted to the transmission frequency band of the GSM 900 frequency range and to the transmission frequency band of the DCS 1800 frequency range.

GSM and DCS reception signals are received by a second antenna ANT2 which is adapted to the reception frequency band of the DCS 1800 frequency range and to the reception frequency band of the GSM 900 frequency range [and, following]. Following corresponding filtering by a diplexer, the signals are amplified by corresponding reception amplifiers DCS LNA (low noise amplifiers) GSM LNA. It is thus possible to dispense with antenna switches and thereby implement a small, lightweight antenna array.

Figure 2 shows a block diagram of an antenna array A, in which different antennas ANT are provided for different frequency bands and different antennas

are likewise provided for the transmission mode and the reception mode.

GSM transmission signals are amplified by a GSM power amplifier GSM PA and are fed via a connection of  
5 the associated antenna ANT1 which is adapted to the transmission frequency band of the GSM 900 frequency range. DCS transmission signals are amplified by a corresponding different power amplifier DCS PA and are fed to a second antenna ANT2 which is adapted to the  
10 transmission frequency band of the DCS 1800 frequency range and is emitted there.

DCS reception signals are received by a third antenna ANT3 which is adapted to the reception frequency band of the DCS 1800 frequency range, are  
15 amplified by a corresponding reception amplifier DCS LNA (low noise amplifier) and, following demodulation and filtering, are fed to a digital signal processor of a radio station. GSM reception signals are received by a fourth correspondingly adapted antenna ANT4 and are  
20 amplified by a corresponding reception amplifier device GSM LNA. It is thus possible to dispense with antenna switches and diplexers and thereby implement a small, lightweight antenna array.

In designs of the invention, further antennas  
25 are provided which are either likewise used to implement frequency duplex operation, albeit in a different frequency range, or to implement time duplex operation in a different frequency range, to which antenna switches or diplexers can be assigned for  
30 signal separation. Examples of further frequency ranges are the frequency ranges of third-generation mobile radio systems such as the UMTS system which is currently being standardized (combination of wideband

CDMA and TD/CDMA), or other CDMA systems [or], the DECT system, or other cordless systems.

Figure 3 shows an embodiment which differs from the design shown in Figure 1 in that different antennas  
 5 ANT2, ANT3 are provided for the reception signals according to the different frequency ranges, thereby eliminating the need for a diplexer.

Figure 4 shows an embodiment which differs from the design shown in Figure 1 in that different  
 10 transmission amplifiers GSM PA, DCS PA and different antennas are provided according to the different frequency ranges.

Figure 5 shows a section view of a patch antenna comprising a connection ANK, a ground area M,  
 15 an [insulating] insulation, for example ceramic, a substrate SUB, a resonator RES and a short circuit K between the resonator RES and the ground area M. The polarization direction POL of a patch antenna of this type is indicated by the double arrow. The signals can  
 20 also be connected in a different manner to that shown here, for example capacitively.

Figure 6 shows an antenna array comprising four antennas which correspond to a transmission mode and a reception mode in two frequency ranges and which are  
 25 arranged on a support, for example a board or substrate SUB, with corresponding connections ANK1-4, resonators RES1-4, and short circuits K1-4 between the ground area and the resonators.

In order as far as possible to prevent the  
 30 excitation of a reception antenna by the corresponding transmission antenna in the same frequency range, the polarization directions of the corresponding transmission and reception antennas are aligned at right angles to one another.

In a different design of the invention, the different antennas are physically separated and are implemented with the maximum possible spacing between them. This can also result in prevention of the  
5   aforementioned undesirable excitations.

In a different embodiment, all or at least some of the antennas are aligned in parallel with one another.

In a further embodiment of the invention, the  
10   individual antennas or resonators are narrowband antennas or resonators. This can also result in prevention of the aforementioned undesirable excitations.

Figure 7 shows a radio station which may, in  
15   particular, be a mobile station MS, comprising an operating unit MMI, a control device STE, a processing device VE, a power supply device SVE, a reception device EE, and a transmission device SE.

The control device STE essentially comprises a  
20   program-controlled microcontroller, which controls and monitors all essential elements and functions of the radio station.

The processing device VE can also be formed by a digital signal processor DSP.

25   The radio-frequency component HF comprises the transmission device SE, with a modulator and an amplifier, and a reception device EE with a demodulator and likewise an amplifier.

The frequency of a voltage-controlled  
30   oscillator VCO is fed via the synthesizer SYN to the transmission device SE and the reception device EE. The system clock for timing the processor devices of the equipment can also be generated by means of the voltage-controlled oscillator VCO. Reception signals

are received and transmission signals are transmitted via the antenna array A, as shown in Figure 1.

While the invention has been illustrated and described in detail in the drawings and foregoing  
5 description, the same is to be considered as illustrative and not restrictive in character, it being understood that only the preferred embodiment has been shown and described and that all changes and  
10 modifications that come within the spirit of the invention are desired to be protected.

[Abstract] [Antenna array for a radio station which can be operated in a plurality of frequency ranges, and a radio station]

ABSTRACT OF THE DISCLOSURE

5

An antenna array for a radio station which can be operated in a plurality of frequency ranges has a plurality of antennas, with different antennas being provided for transmission signals and reception  
10 signals.

[Figure 1]

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203

## Description

Antenna array for a radio station which can be operated in a plurality of frequency ranges, and a radio station

5

The invention relates to an antenna array for a radio station which can be operated in a plurality of frequency ranges, and a radio station, in particular a multiband mobile station.

10 National regulatory authorities divide a frequency range (around 900 MHz) provided for a radio system or mobile radio system, for example the GSM 900 (Global System for Mobile Communication) system, into different frequency bands, which are then allocated to  
15 different network operators, for example D1, D2. A different frequency range (around 1800 MHz) is allocated to a different mobile radio system, the DCS 1800 (Digital Communication System). Further different frequency ranges are allocated to further, if  
20 necessary, future mobile radio systems, such as the UMTS (Universal Mobile Telephony System) which is currently being standardized. In the case of a duplex system involving FDD (Frequency Division Duplex) systems such as the GSM system, different frequency  
25 bands can be provided for the uplink (mobile station to base station) than for the downlink (base station to mobile station). The duplex spacing is 45 MHz for the GSM 900 system and 95 MHz for the DCS 1800 system.

Terms and examples used in this application  
30 also often relate to a GSM mobile radio system also; however, they are in no way restricted thereto, but, with reference to the description, can also be easily mapped by the person skilled in the art onto other, if necessary, future mobile radio systems such as CDMA  
35 systems, in particular wideband CDMA systems or TD/CDMA systems.

Mobile stations are known which, under the name of dual-band mobile stations or multiband radio stations, can be operated in a plurality of these frequency ranges and enable alternative communication  
5 via a plurality of these aforementioned mobile radio systems.

Figure 8 shows a schematic representation of a transceiver system of conventional mobile stations of this type. According to the different frequency ranges  
10 of the GSM system and the DCS system in which the mobile station can be operated, different power amplifiers GSM PA, DCS PA are provided whose transmission signals are fed via an antenna switch S and a diplexer D, which essentially comprises a filter,  
15 or diplexer, an antenna ANT, such as a rod antenna. In the opposite direction, reception signals are received by the antenna ANT and the fed via the diplexer D and the antenna switch S to the reception amplifiers (low noise amplifiers) GSM LNA, DCS LNA corresponding to the  
20 different frequency ranges of the different mobile radio systems. An antenna switch S and a diplexer D or diplexer are contained in the antenna array or are assigned to the antenna.

However, there has recently been an  
25 increasing requirement in radio stations, particularly in mobile stations for increasingly smaller, more compact and lighter devices.

The object of the invention is therefore to indicate an antenna array for a radio station which can  
30 be operated in a plurality of frequency ranges and which enables implementation of small, lightweight radio stations, in particular mobile stations.

This object is achieved by the features of the independent claims. Further designs are presented  
35 in the subclaims.

The invention is therefore based on the idea of using a plurality of antennas, whereby different antennas are provided for transmission signals and reception signals.

5           As a result, antenna switches are no longer required and therefore a small, lightweight antenna array can be implemented for a radio station which can be operated in a plurality of frequency ranges.

In a further design, different antennas are  
10 also provided for different frequency ranges.

As a result, a diplexer or duplexer can also be dispensed with and an even smaller, more lightweight antenna array can therefore be implemented.

In a further embodiment of the invention, the polarization direction of an antenna for transmission signals differs from the polarization direction of an antenna for reception signals.

The excitation of a reception antenna by a corresponding transmission antenna fitted in the same radio station can thus be prevented.

The invention is described in detail below with reference to preferred embodiments, which are explained by means of the figures listed below:

Figure 1 is a block diagram of an antenna  
25 array with different antennas for transmission signals  
and reception signals;

Figure 2 is a block diagram of an antenna array with different antennas for different frequency ranges, transmission signals and reception signals;

30

Figure 3 is a block diagram of an antenna array with different antennas for transmission signals and reception signals and for reception signals of different frequency ranges;

5           Figure 4 is a block diagram of an antenna array with different antennas for transmission signals and reception signals and for transmission signals of different frequency ranges;

10           Figure 5 is a cross section of a patch antenna;

Figure 6 is an antenna array with different polarization directions for transmission signals and reception signals;

15           Figure 7 is a block diagram of a radio station;

Figure 8 is a block diagram of a conventional antenna array.

20           Figure 1 shows a block diagram of an antenna array A, in which different antennas ANT are provided for transmission mode and reception mode. In order to show the embodiments clearly, the block diagrams of the antenna arrays are substantially simplified and therefore show no passive components, such as filters, 50-ohm adapter circuits, or power-regulating loops of  
25           the amplifiers. The transmission and reception amplifiers can also be regarded as representing the transmission and reception paths.

30           In the context of this application, an "antenna" also contains a resonator and a connection assigned to this resonator.

35           GSM and DCS transmission signals are amplified by a GSM DCS power amplifier GSM DCS PA and are fed and emitted via a connection of the associated antenna ANT1 which is adapted to the transmission frequency band of the GSM 900 frequency range and to the transmission frequency band of the DCS 1800

frequency range.

GSM and DCS reception signals are received by a second antenna ANT2 which is adapted to the reception frequency band of the DCS 1800 frequency range and to the reception frequency band of the GSM 900 frequency range and, following corresponding filtering by a diplexer, are amplified by corresponding reception amplifiers DCS LNA (low noise amplifiers) GSM LNA. It is thus possible to dispense with antenna switches and thereby implement a small, lightweight antenna array.

Figure 2 shows a block diagram of an antenna array A, in which different antennas ANT are provided for different frequency bands and different antennas are likewise provided for transmission mode and reception mode.

GSM transmission signals are amplified by a GSM power amplifier GSM PA and fed via a connection of the associated antenna ANT1 which is adapted to the transmission frequency band of the GSM 900 frequency range. DCS transmission signals are amplified by a corresponding different power amplifier DCS PA and fed to a second antenna ANT2 which is adapted to the transmission frequency band of the DCS 1800 frequency range and emitted.

DCS reception signals are received by a third antenna ANT3 which is adapted to the reception frequency band of the DCS 1800 frequency range, are amplified by a corresponding reception amplifier DCS LNA (low noise amplifier) and, following demodulation and filtering, are fed to a digital signal processor of a radio station. GSM reception signals are received by a fourth correspondingly adapted antenna ANT4 and are amplified by a corresponding reception amplifier device GSM LNA. It is thus possible to dispense with antenna switches and diplexers and thereby implement a small, lightweight antenna array.

In designs of the invention, further antennas are provided which are either likewise used to implement frequency duplex operation, albeit in a different frequency range, or to implement time duplex operation in a different frequency range, to which antenna switches or diplexers can be assigned for signal separation. Examples of further frequency ranges are the frequency ranges of third-generation mobile radio systems such as the UMTS system which is currently being standardized (combination of wideband CDMA and TD/CDMA), or other CDMA systems or the DECT system or other cordless systems.

Figure 3 shows an embodiment which differs from the design shown in Figure 1 in that different antennas ANT2, ANT3 are provided for the reception signals according to the different frequency ranges, thereby eliminating the need for a diplexer.

Figure 4 shows an embodiment which differs from the design shown in Figure 1 in that different transmission amplifiers GSM PA, DCS PA and different antennas are provided according to the different frequency ranges.

Figure 5 shows a section view of a patch antenna comprising a connection ANK, a ground area M, an insulating, for example ceramic, substrate SUB, a resonator RES and a short circuit K between the resonator RES and the ground area M. The polarization direction POL of a patch antenna of this type is indicated by the double arrow. The signals can also be connected in a different manner to that shown here, for example capacitively.

Figure 6 shows an antenna array comprising four antennas which correspond to a transmission mode and a reception mode in two frequency ranges and which are arranged on a support, for example a board or  
5 substrate SUB, with corresponding connections ANK1-4, resonators RES1-4 and short circuits K1-4 between the ground area and the resonators.

In order as far as possible to prevent the excitation of a reception antenna by the corresponding  
10 transmission antenna in the same frequency range, the polarization directions of the corresponding transmission and reception antennas are aligned at right angles to one another.

In a different design of the invention, the  
15 different antennas are physically separated and are implemented with the maximum possible spacing between them. This can also result in prevention of the aforementioned undesirable excitations.

In a different embodiment, all or at least  
20 some of the antennas are aligned in parallel with one another.

In a further embodiment of the invention, the individual antennas or resonators are narrowband  
25 antennas or resonators. This can also result in prevention of the aforementioned undesirable excitations.

Figure 7 shows a radio station which may, in particular, be a mobile station MS, comprising an operating unit MMI, a control device STE, a processing  
30 device VE, a power supply device SVE, a reception device EE and a transmission device SE.

The control device STE essentially comprises a program-controlled microcontroller, which controls and monitors all essential elements and functions of  
35 the radio station.

The processing device VE can also be formed by a digital signal processor DSP.

5 The radio-frequency component HF comprises the transmission device SE, with a modulator and an amplifier, and a reception device EE with a demodulator and likewise an amplifier.

10 The frequency of a voltage-controlled oscillator VCO is fed via the synthesizer SYN to the transmission device SE and the reception device EE. The system clock for timing the processor devices of the equipment can also be generated by means of the voltage-controlled oscillator VCO. Reception signals are received and transmission signals are transmitted via the antenna array A, as shown in Figure 1.

15

2000-1-25-040004

## Claims

1. A mobile station for operation within different mobile radio systems, to which a different frequency range is in each case allocated, each frequency range in each case having a transmission frequency band and a reception frequency band, with
- a first transmission antenna for transmitting signals within the transmission frequency band of a first frequency range,
  - a second transmission antenna for transmitting signals within the transmission frequency band of a second frequency range,
  - a first reception antenna for receiving signals within the reception frequency band of the first frequency range, and
  - a second reception antenna for receiving signals within the reception frequency band of the second frequency range.
2. The mobile station as claimed in claim 1, in which
- the first transmission antenna is identical to the second transmission antenna.
3. The mobile station as claimed in one of claims 1 or 2, in which the first reception antenna is identical to the second reception antenna.

Abstract

Antenna array for a radio station which can be operated in a plurality of frequency ranges, and a radio station


An antenna array for a radio station which can be operated in a plurality of frequency ranges has a plurality of antennas, different antennas being provided for transmission signals and reception signals.

Figure 1

2025 RELEASE UNDER E.O. 14176


1/8

FIG 1

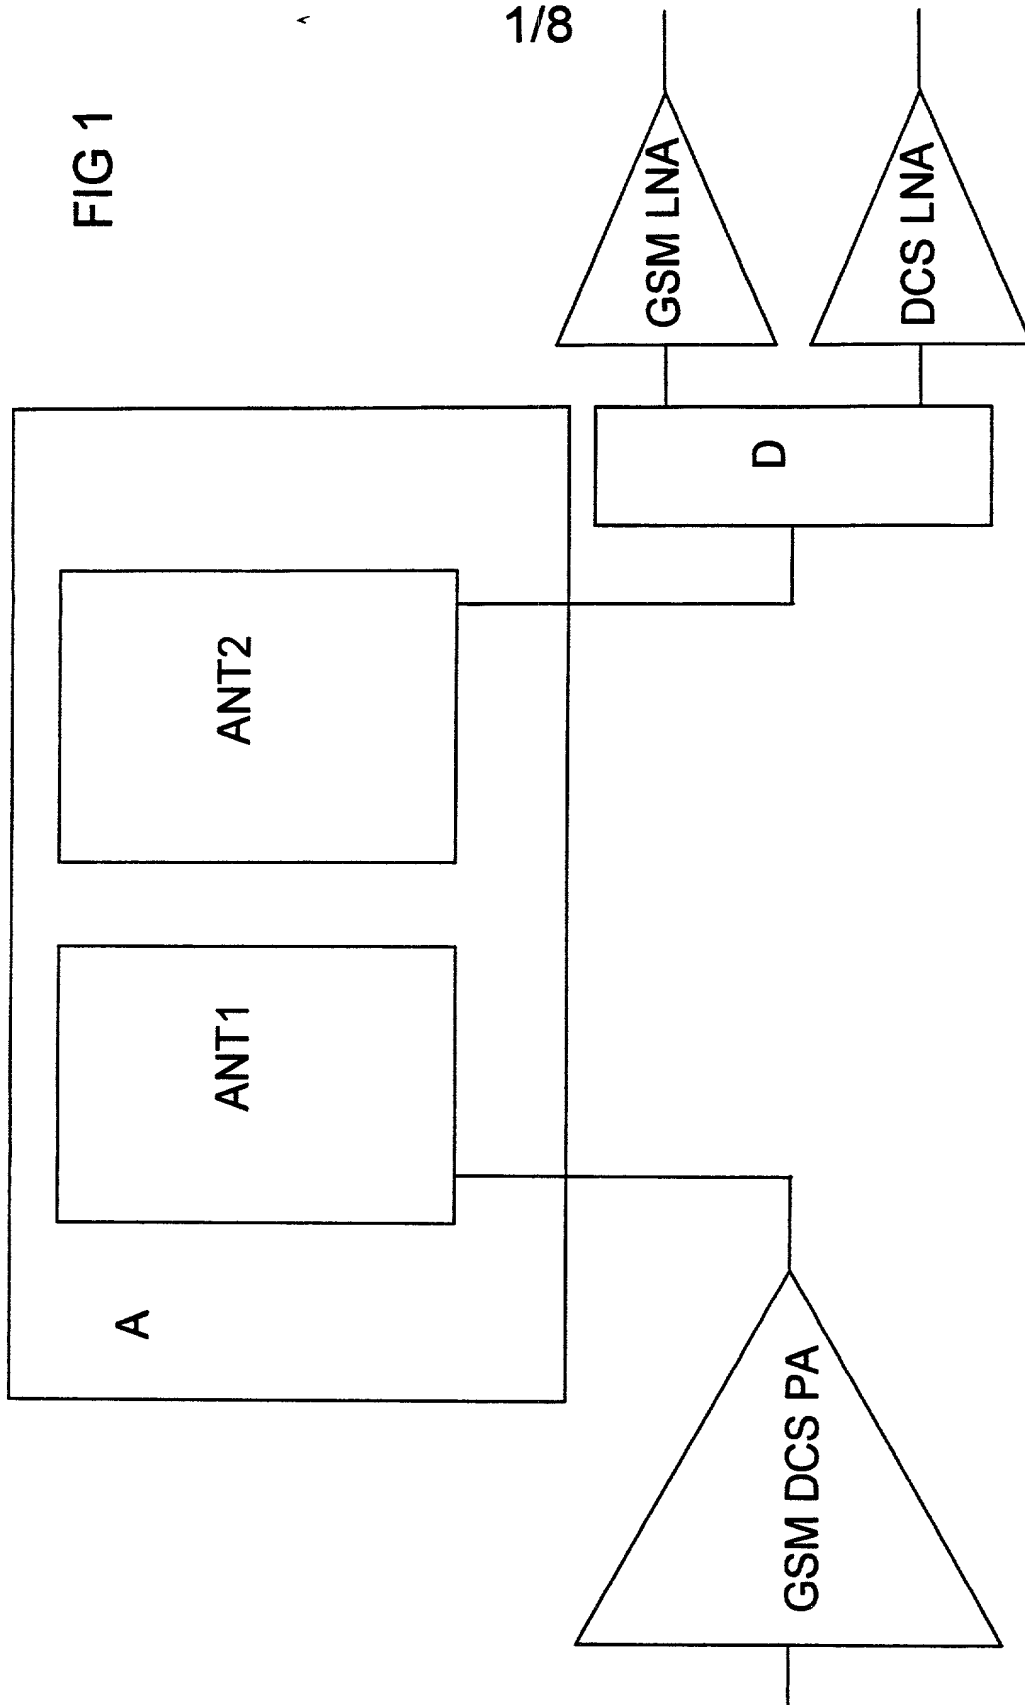


2/8

FIG 2

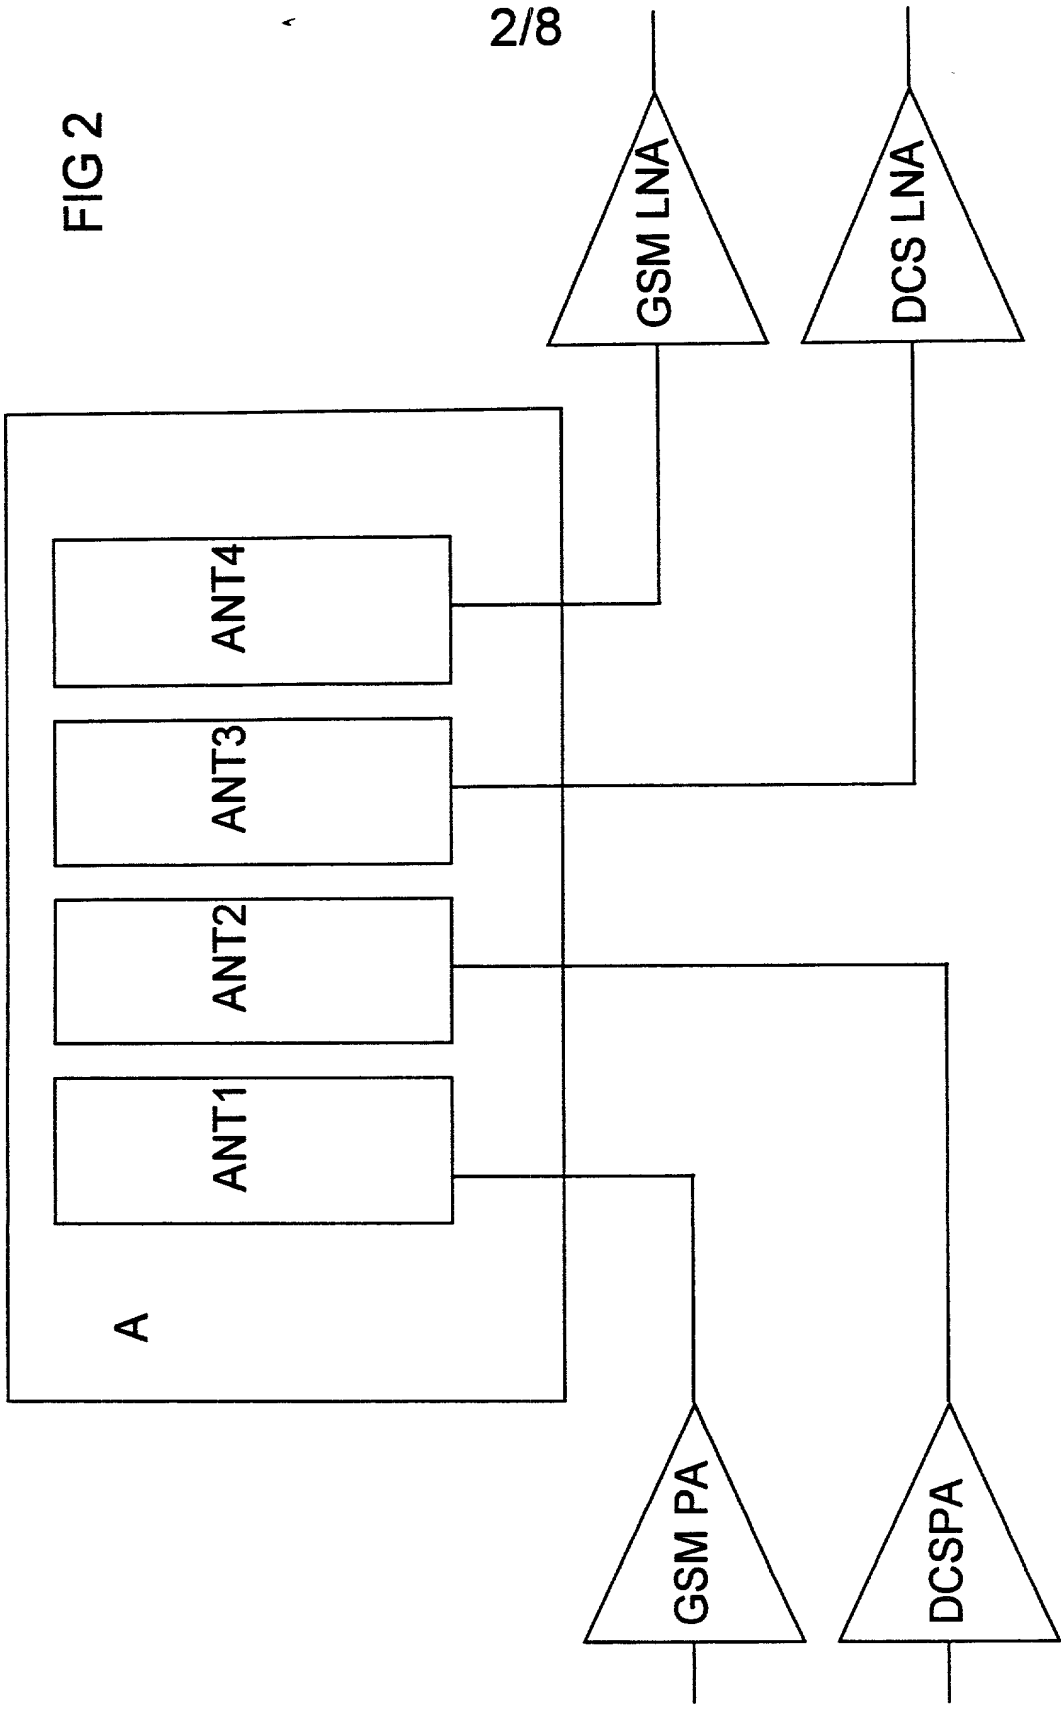

3/8

FIG 3

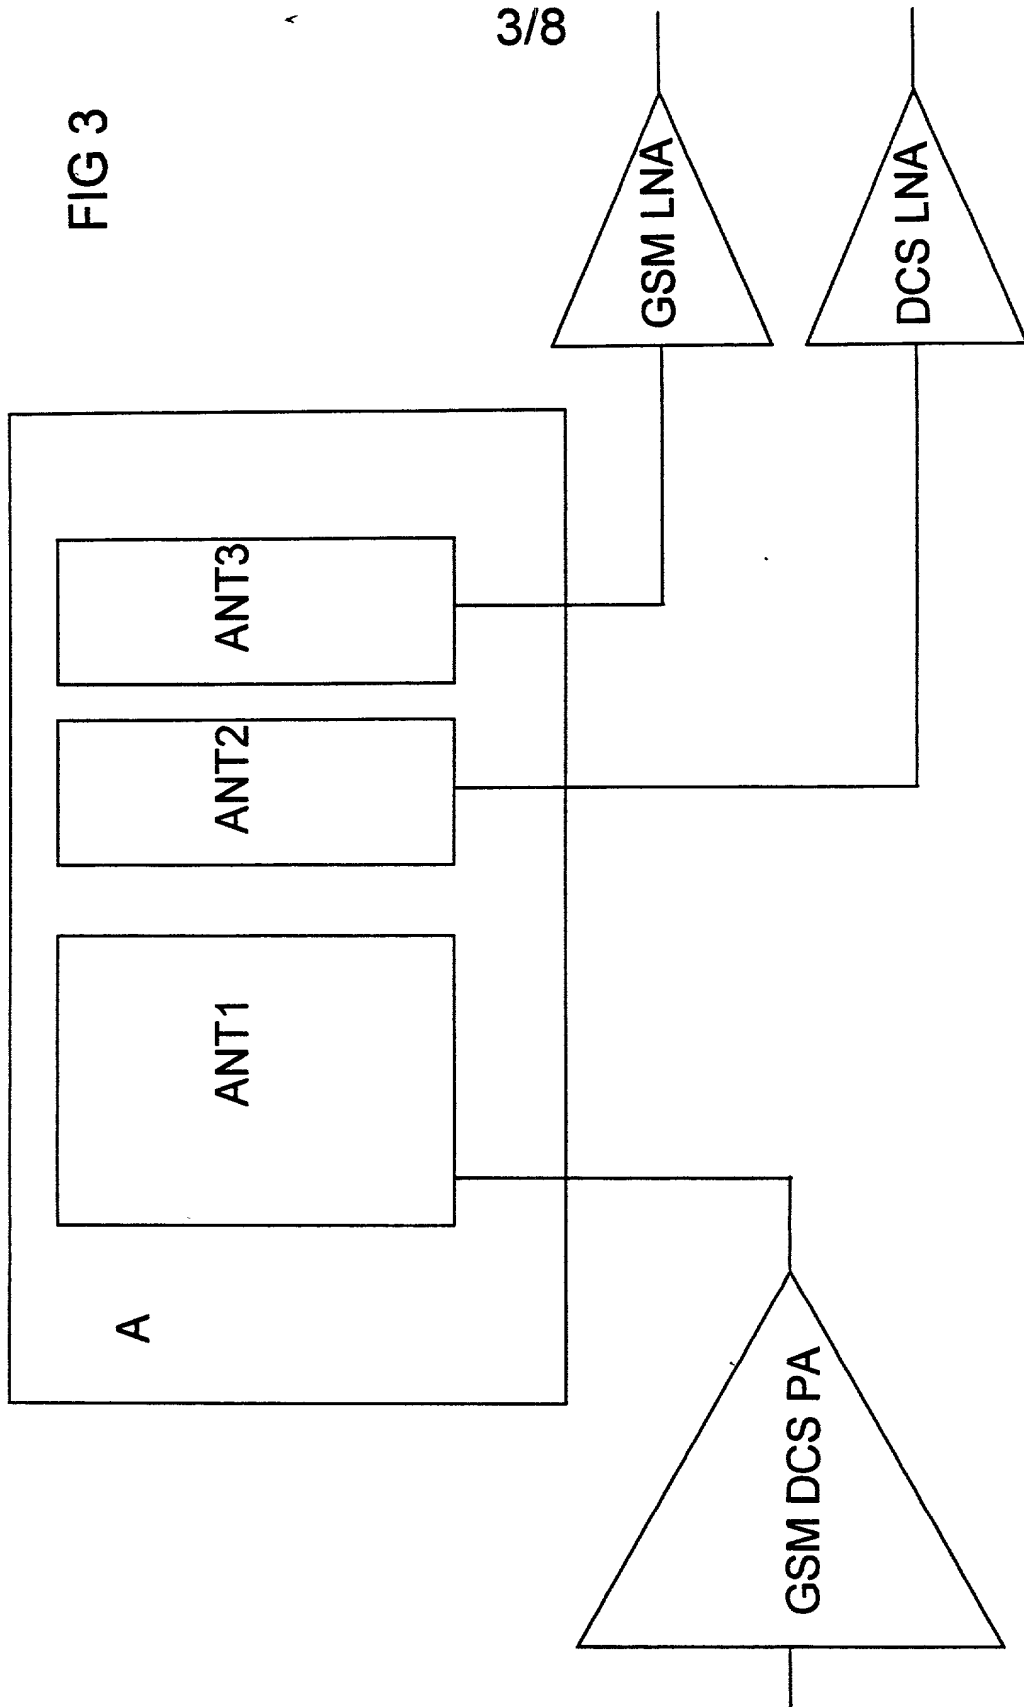

4/8

FIG 4


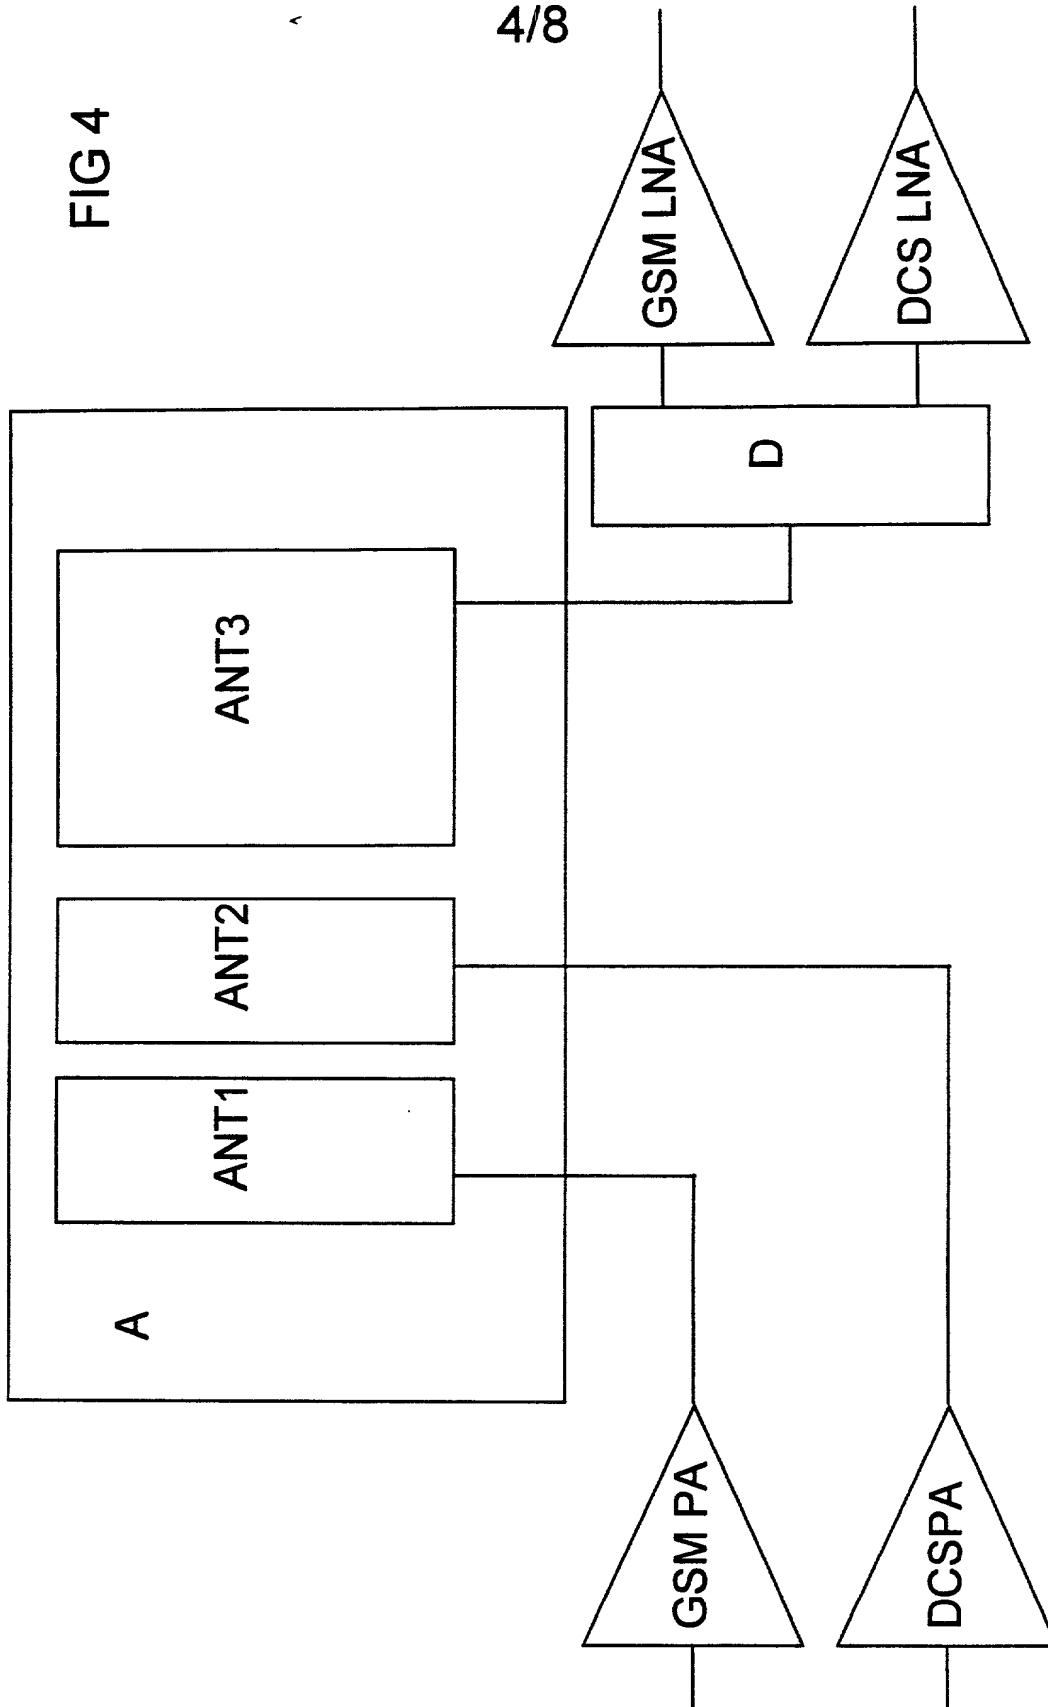


FIG 5

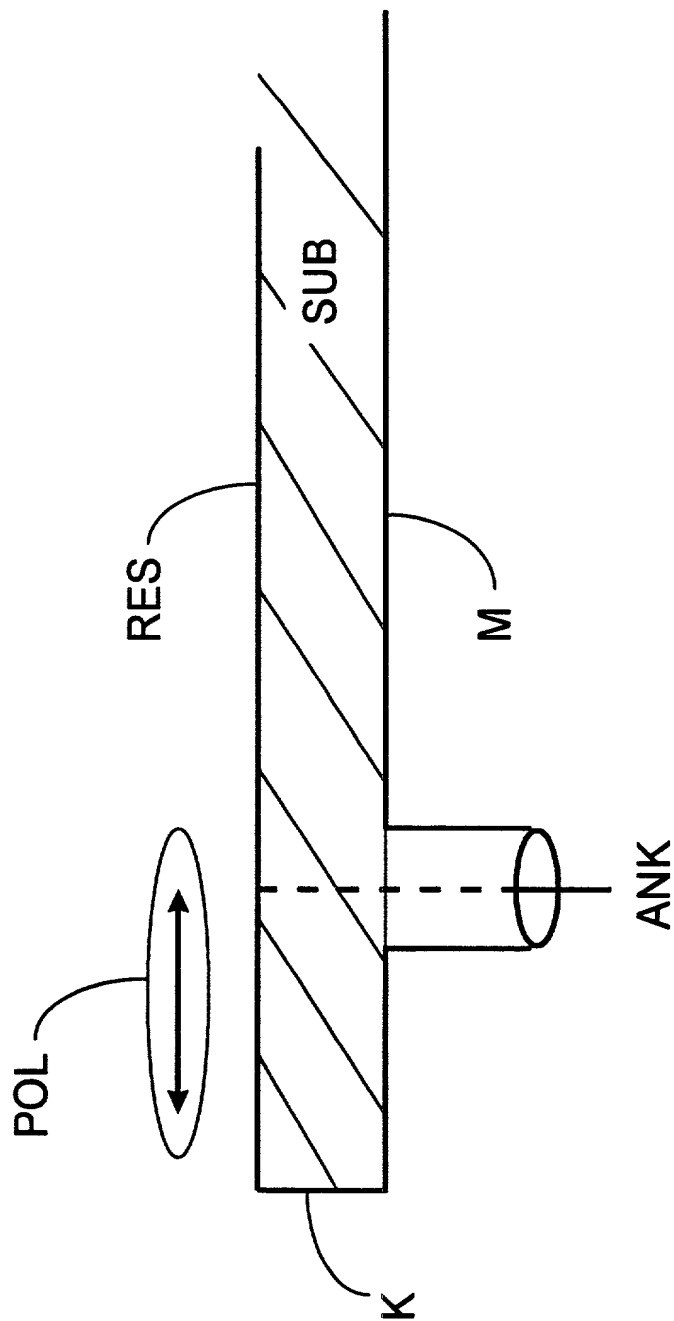

7/8

FIG 7


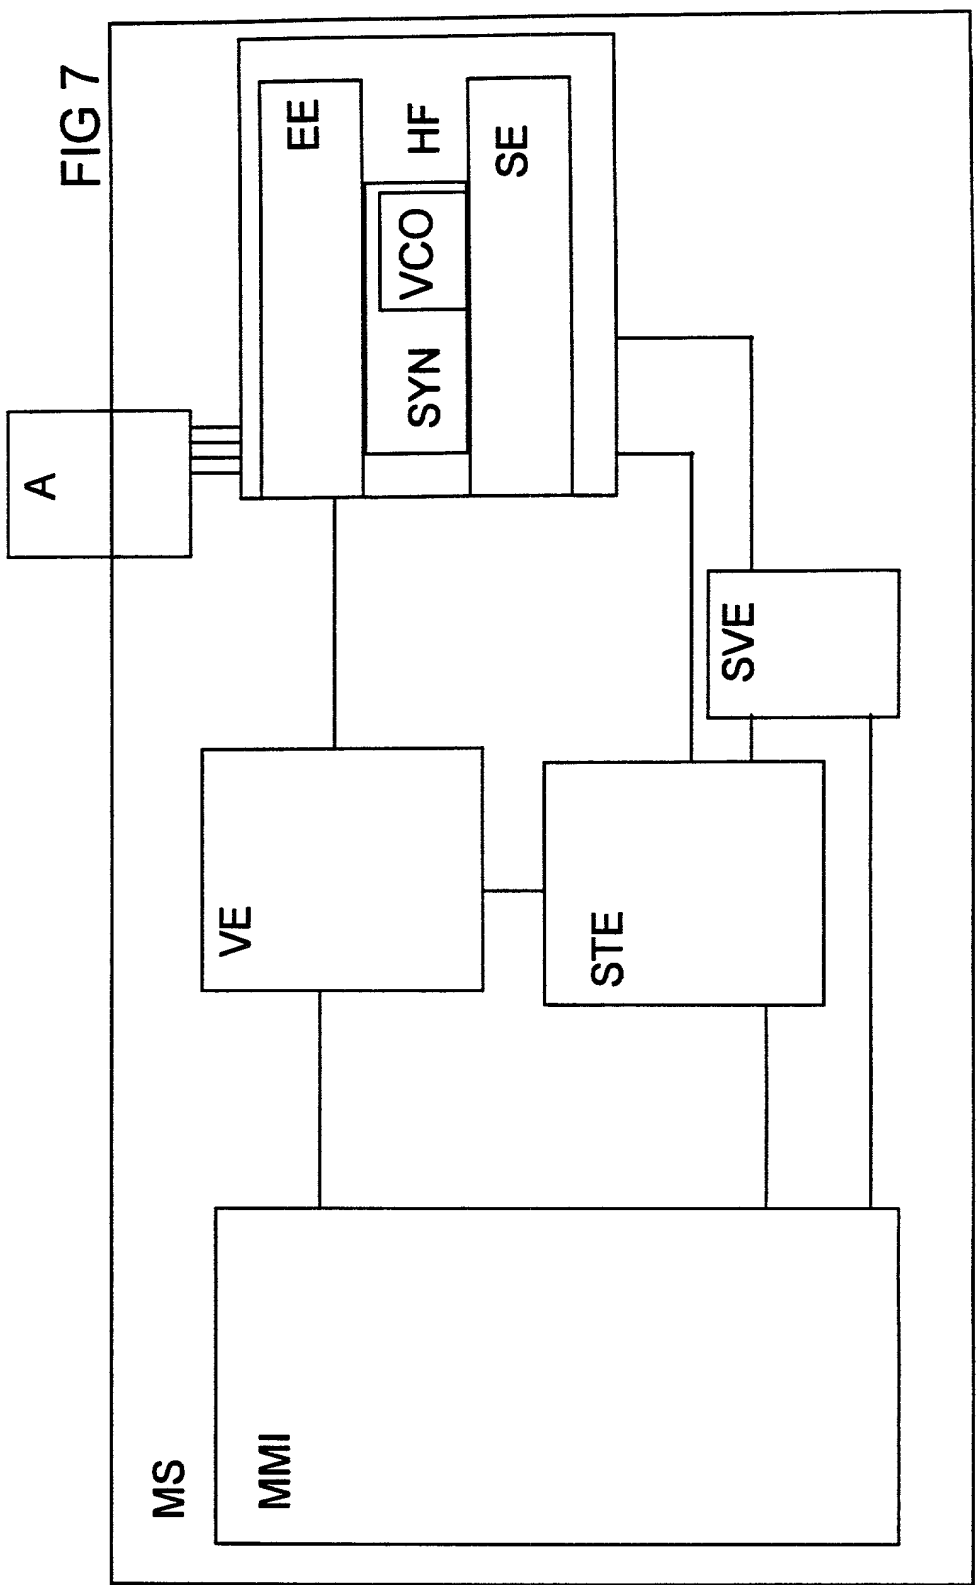


FIG 8

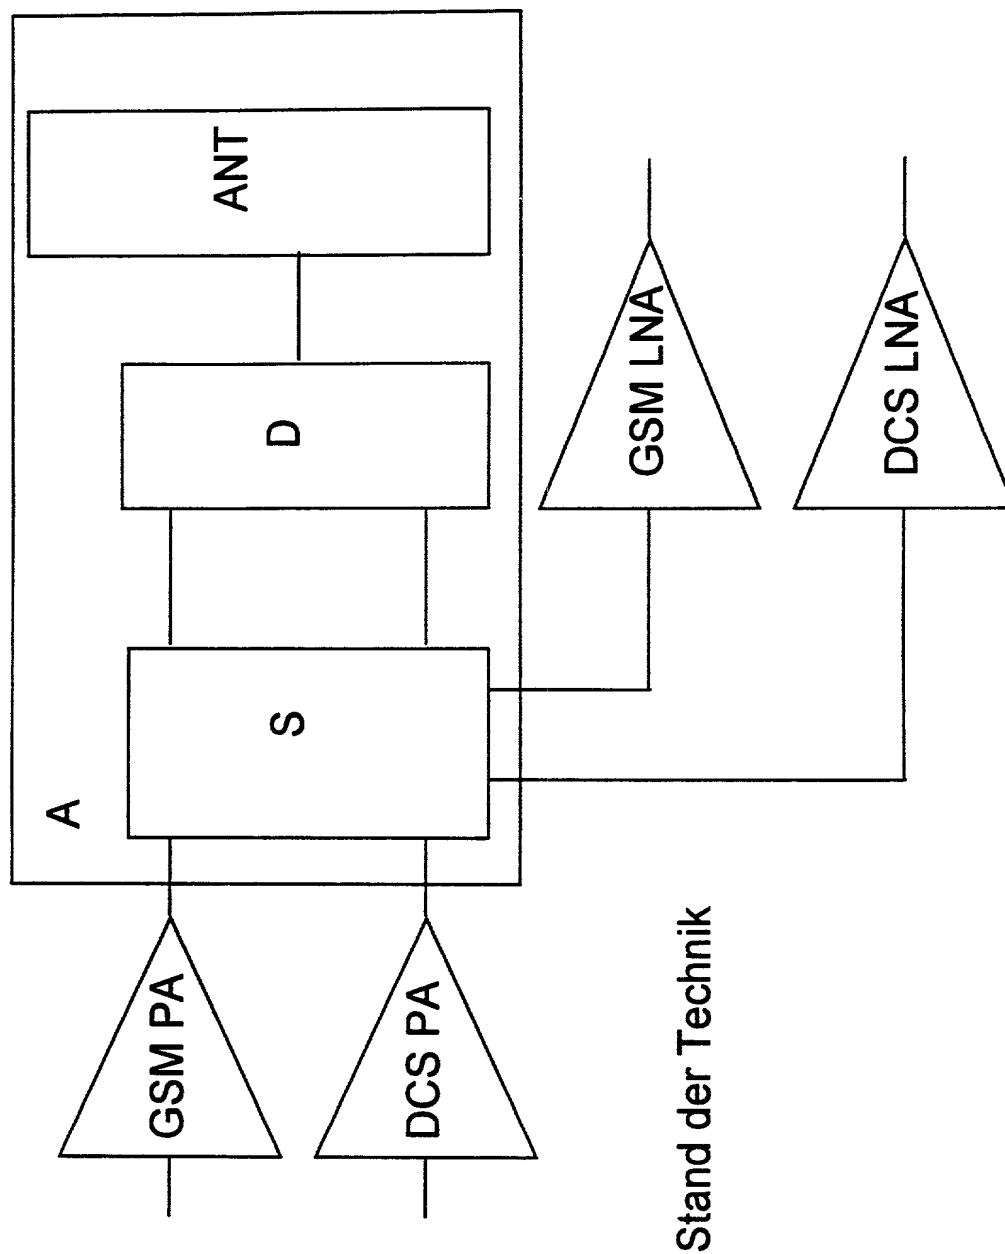

# Declaration and Power of Attorney For Patent Application

## Erklärung Für Patentanmeldungen Mit Vollmacht

### German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:

Antennenanordnung für eine in mehreren Frequenzbereichen betreibbare Funkstation und Funkstation

deren Beschreibung

(zutreffendes ankreuzen)

☐ hier beigefügt ist.

☒ am 01. Oktober 1999 als

PCT internationale Anmeldung

PCT Anwendungsnummer PCT/DE99/03170

eingereicht wurde und am \_\_\_\_\_  
abgeändert wurde (falls tatsächlich abgeändert).

Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind, an.

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

the specification of which

(check one)

☐ is attached hereto.

☐ was filed on \_\_\_\_\_ as

PCT international application

PCT Application No. \_\_\_\_\_

and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

# Declaration and Power of Attorney For Patent Application

## Erklärung Für Patentanmeldungen Mit Vollmacht

### German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:

Antennenanordnung für eine in mehreren Frequenzbereichen betreibbare Funkstation und Funkstation

deren Beschreibung

(zutreffendes ankreuzen)

☒ hier beigefügt ist.

☐ am \_\_\_\_\_ als

PCT internationale Anmeldung

PCT Anwendungsnummer \_\_\_\_\_

eingereicht wurde und am \_\_\_\_\_

abgeändert wurde (falls tatsächlich abgeändert).

Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind, an.

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

the specification of which

(check one)

☐ is attached hereto.

☐ was filed on \_\_\_\_\_ as

PCT international application

PCT Application No. \_\_\_\_\_

and was amended on \_\_\_\_\_

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

# German Language Declaration

Prior foreign applications  
Priorität beansprucht

Priority Claimed

<u>198 47 660.4</u>	<u>Germany</u>	<u>15. Oktober 1998</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day Month Year Filed)	Yes	No
(Nummer)	(Land)	(Tag Monat Jahr eingereicht)	Ja	Nein
<u>                    </u>	<u>                    </u>	<u>                    </u>	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day Month Year Filed)	Yes	No
(Nummer)	(Land)	(Tag Monat Jahr eingereicht)	Ja	Nein
<u>                    </u>	<u>                    </u>	<u>                    </u>	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day Month Year Filed)	Yes	No
(Nummer)	(Land)	(Tag Monat Jahr eingereicht)	Ja	Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

<u>                    </u>	<u>                    </u>	<u>                    </u>	<u>                    </u>
(Application Serial No.)	(Filing Date)	(Status)	(Status)
(Anmeldeseriennummer)	(Anmeldedatum)	(patentiert, anhangig, aufgegeben)	(patented, pending, abandoned)
<u>                    </u>	<u>                    </u>	<u>                    </u>	<u>                    </u>
(Application Serial No.)	(Filing Date)	(Status)	(Status)
(Anmeldeseriennummer)	(Anmeldedatum)	(patentiert, anhangig, aufgeben)	(patented, pending, abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden koennen, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

## German Language Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: (Name und Registrationsnummer anführen)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

And I hereby appoint  
Messrs. John D. Simpson (Registration No. 19,842), Lewis T. Steadman (17,074), William C. Stueber (16,453), P. Phillips Connor (19,259), Dennis A. Gross (24,410), Marvin Moody (16,549), Steven H. Noll (28,982), Brett A. Valiquet (27,841), Thomas I. Ross (29,275), Kevin W. Guynn (29,927), Edward A. Lehmann (22,312), James D. Hobart (24,149), Robert M. Barrett (30,142), James Van Santen (16,584), J. Arthur Gross (13,615), Richard J. Schwarz (13,472) and Melvin A. Robinson (31,870), David R. Metzger (32,919), John R. Garrett (27,888) all members of the firm of Hill, Steadman & Simpson, A Professional Corporation.

Telefongespräche bitte richten an:  
(Name und Telefonnummer)

Direct Telephone Calls to: (name and telephone number)


312/876-0200  
Ext. \_\_\_\_\_

Postanschrift:

Customer  
NR 26514

Send Correspondence to:

**HILL, STEADMAN & SIMPSON**  
A Professional Corporation  
85th Floor Sears Tower, Chicago, Illinois 60606

Voller Name des einzigen oder ursprünglichen Erfinders:		Full name of sole or first inventor:	
ECKERT, Rainer			
Unterschrift des Erfinders	Datum	Inventor's signature	Date
	10.02.01		
Wohnsitz		Residence	
D-81677 München, Germany DEX			
Staatsangehörigkeit		Citizenship	
Bundesrepublik Deutschland			
Postanschrift		Post Office Address	
Zaubzerstr. 29			
D-81677 München			
Bundesrepublik Deutschland			
Voller Name des zweiten Miterfinders (falls zutreffend):		Full name of second joint inventor, if any:	
Unterschrift des Erfinders	Datum	Second Inventor's signature	Date
Wohnsitz		Residence	
Staatsangehörigkeit		Citizenship	
Postanschrift		Post Office Address	

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).